

## Metal Processing CNC Lathe Machine Ck0660 Gang Type Tool Holder Hydraulic Chuck Collect

Our Product Introduction

for more products please visit us on [luyoungcncmachines.com](http://luyoungcncmachines.com)

### Basic Information

- Brand Name: Luyoung
- Certification: CE
- Model Number: ck0660
- Minimum Order Quantity: 1
- Price: 5600-5900
- Packaging Details: Fumigation-free plywood
- Delivery Time: 45 working days
- Payment Terms: T/T
- Supply Ability: 100sets



### Product Specification

- Max.swing Over Bed:  $\Phi 300\text{mm}$
- Max.swing Over Cross Slide:  $\Phi 130\text{mm}$
- Max.work Piece Length: 240mm
- Spindle Speed : 50-2500rpm
- Spindle Bore: 60mm
- X-axis Fast Feeding Speed: 6m/min
- Z--axis Fast Feeding Speed: 8m/min
- Length× Width × High : 1550×920×1450
- Net Weight : 850kg
- Color: White And Black
- Model: Ck0660
- Main Motor Power: 3KW
- X-axis Travel Stroke(mm): 200
- Classification: Hydraulic



### More Images




## Product Description

Metal processing CNC lathe machine ck0660 gang type tool holder hydraulic chuck collect  
**High quality CK0640 CNC lathe Metal processing lathe Horizontal lathe with high rigidity Factory price CNC machines**  
**Light duty lathe for metal** is widely used in processing and manufacturing the electrical appliance, instrument industry, automobile, motorcycle, fastener bearings, photographic and film machinery, hardware tools, watches, glasses, stationery, motors, valves and gas pipe and other high precise and complex components. It is the ideal high efficient equipment in the hardware machining industry.







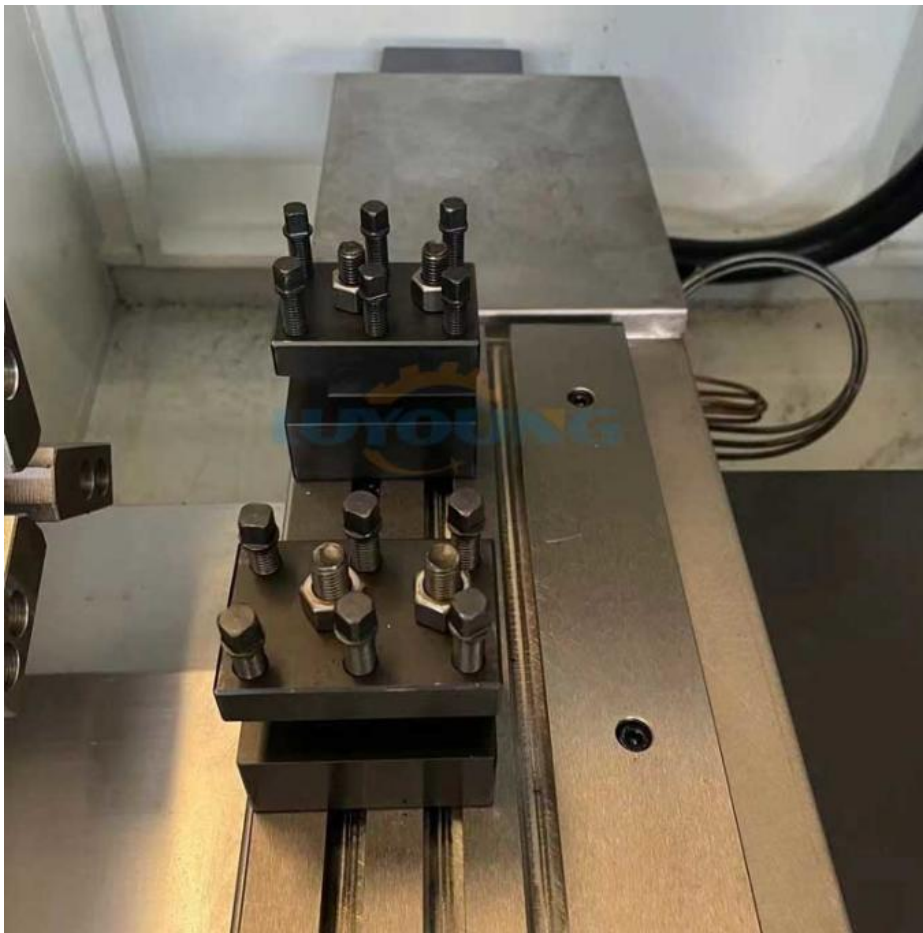

CK0640			
Item	Parameter	Unit	CK0660 CNC LATHE
Capacity	Max.swing over bed	mm	Φ300
	Max.swing over cross slide	mm	Φ130

	Max.work piece length	mm	240
Spindle	spindle speed	rpm	50-2500
	Spindle bore	mm	60
Fast feeding speed	X-axis Fast feeding speed	m/min	6
	Z--axis Fast feeding speed	m/min	8
Axis stroke	X-axis travel stroke(mm)	mm	200
	Z--axis travel stroke(mm)	mm	/
Power	Main motor power	KW	3
Clamping	Type	/	Pneumatic collect
Thread machining scope	Metric system(mm)	mm	0.25~12
	British system		28~3 1/2
Tail stock	Tail stock sleeve dia.	mm	/
	Tail stock sleeve travel	mm	/
	Tail stock sleeve taper		/
Dimension	length× width × high	mm	1550×920×1450
Weight	Net weight	KG	850
<b>Standard configuration</b>		<b>Option configuration</b>	
GSK928TD-L		Siemens, Fanuc cnc controller	
Pneumatic spring collect (2pcs free)		Pneumatic chuck,Hydraulic chuck	
Gang type tool carrier		4 station electrical tool holder	
Auto lubrication system		Auto feeder system	
Lighting system		Tail stock	
cooling system			
380V 3 phase if your local have special request pls let us know			

**Product Features: High quality CK0660 CNC lathe Metal processing lathe Horizontal lathe with high rigidity Factory price CNC machines Light duty lathe for metal**

1. This machine has a high strength with widening the carriage, most suitable for metal cutting.
2. High precision bearings, which are adopted for the spindle to realize the high accuracy and load capacity.
3. The machine main drive adopts imported inverter variable speed motor to realize infinitely variable speed.
4. Standard configuration: spring chuck and chuck double use.
5. Optional configuration: hydraulic chuck, gang type tool post.

Optional auto bar feeder:



